

UNIVERSAL TRANSMITTER



- Input for RTD, TC, Ohm, potentiometer, mA and V
- 2-wire supply > 16 V
- Programmable via display front
- Output for current, voltage and 2 relays
- Universal AC or DC supply



Application:

- Linearised, electronic temperature measurement with RTD or TC sensor.
- Conversion of linear resistance variation to a standard analogue current / voltage signal, i.e. from solenoids and butterfly valves or linear movements with attached potentiometer.
- Power supply and signal isolator for 2-wire transmitters.
- Process control with 2 pairs of potential-free relay contacts and analogue output.
- Galvanic separation of analogue signals and measurement of floating signals.
- The 4116 is designed according to strict safety requirements and is thus suitable for application in SIL 2 installations.

Technical characteristics:


- When 4116 is used in combination with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4116 is designed with electronic hardware switches, it is not necessary to open the module for setting of DIP switches.
- A green / red front LED indicates normal operation and malfunction. A yellow LED is ON for each active output relay.
- Continuous check of vital stored data for safety reasons.
- 4-port 2.3 kVAC galvanic isolation.

Mounting / installation:


- Mounted vertically or horizontally on a DIN rail. As the modules can be mounted without any distance between neighbouring units, up to 42 modules can be mounted per metre.

Applications


Input signals:

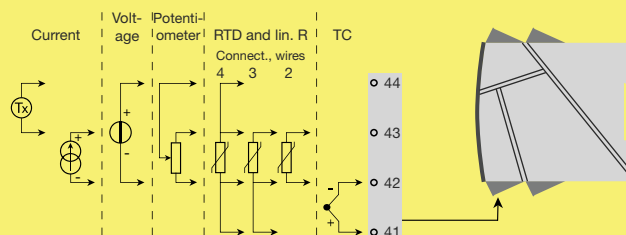

Output signals:

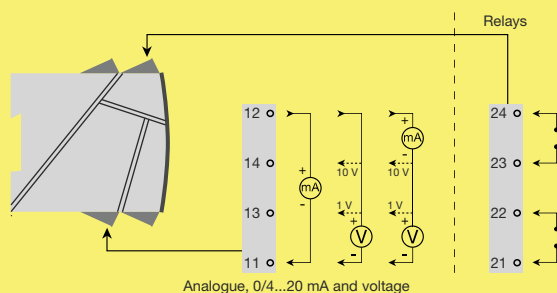

Supply:

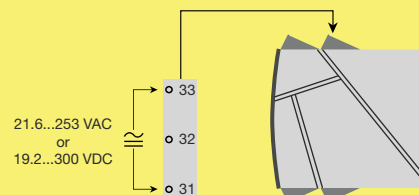

Order codes:

4116 = Universal transmitter

4501 = Display / programming front

PR 4501 Display / programming front



Application:

- Communications interface for modification of operational parameters in 4116.
- Can be moved from one 4116 module to another and download the configuration of the first transmitter to subsequent transmitters.
- Fixed display for visualisation of process data and status.

Technical characteristics:

- LCD display with 4 lines; 1 lines with the height 5.57 mm, 2 lines with the height 3.33 mm, and 1 line with fixed icons.
- Programming access can be blocked by assigning a password. The password is saved in the transmitter in order to ensure a high degree of protection against unauthorised modifications to the configuration.

Mounting / installation:

- Click 4501 onto the front of 4116.

Electrical specifications:

Specifications range:

-20°C to +60°C

Common specifications:

Supply voltage, universal 24...230 VAC ±10%
 50...60 Hz
 24...250 VDC ±20%
 Max. consumption..... ≤ 2.5 W
 Fuse..... 400 mA SB / 250 VAC
 Isolation voltage, test / operation..... 2.3 kVAC / 250 VAC
 Communications interface Programming front 4501
 Signal / noise ratio..... Min. 60 dB (0...100 kHz)
 Response time (0...90%, 100...10%):
 Temperature input ≤ 1 s
 mA / V input..... ≤ 400 ms
 Calibration temperature..... 20...28°C
 Accuracy, the greater of the general and basic values:

General values		
Input type	Absolute accuracy	Temperature coefficient
All	≤ ±0.1% of span	≤ ±0.01% of span / °C

Basic values		
Input type	Basic accuracy	Temperature coefficient
mA	≤ ±4 µA	≤ ±0.4 µA/°C
Volt	≤ ±20 µV	≤ ±2 µV/°C
RTD	≤ ±0.2°C	≤ ±0.01°C/°C
Lin. R	≤ ±0.1 Ω	≤ ±10 mΩ/°C
TC type: E, J, K, L, N, T, U	≤ ±1°C	≤ ±0.05°C/°C
TC type: B, R, S, W3, W5, LR	≤ ±2°C	≤ ±0.2°C/°C

EMC immunity influence < ±0.5% of span
 Extended EMC immunity:
 NAMUR NE 21, A criterion, burst < ±1% of span

Auxiliary supplies:

2-wire supply (terminal 44...43) 25...16 VDC / 0...20 mA
 Max. wire size..... 1 x 2.5 mm² stranded wire
 Screw terminal torque 0.5 Nm
 Relative humidity < 95% RH (non-cond.)
 Dimen., without display front (HxBxD). 109 x 23.5 x 104 mm
 Dimensions, w. display front (HxBxD). 109 x 23.5 x 116 mm
 Tightness (enclosure / terminals)..... IP50 / IP20
 Weight 175 g

Pt100, linear resistance and potentiometer input:

Input-type	Min. value	Max. value	Norm
Pt100	-200°C	+850°C	IEC60751
Lin. R	0 Ω	10000 Ω	-
Potentiometer	10 Ω	100 kΩ	-

Cable resistance p. wire (max.), Pt100. 50 Ω

Sensor current, Pt100 Nom. 0.2 mA
 Effect of sensor cable resistance
 (3- / 4-wire), Pt100..... < 0.002 Ω / Ω
 Sensor error detection, Pt100 Yes
 Short circuit detection, Pt100..... < 15 Ω

TC input:

Type	Min. value	Max. value	Norm
B	+400°C	+1820°C	IEC 60584-1
E	-100°C	+1000°C	IEC 60584-1
J	-100°C	+1200°C	IEC 60584-1
K	-180°C	+1372°C	IEC 60584-1
L	-200°C	+900°C	DIN 43710
N	-180°C	+1300°C	IEC 60584-1
R	-50°C	+1760°C	IEC 60584-1
S	-50°C	+1760°C	IEC 60584-1
T	-200°C	+400°C	IEC 60584-1
U	-200°C	+600°C	DIN 43710
W3	0°C	+2300°C	ASTM E988-90
W5	0°C	+2300°C	ASTM E988-90
LR	-200°C	+800°C	GOST 3044-84

Cold junction compensation (CJC) ... < ±1.0 °C

Sensor error detection..... Yes

Sensor error current:

when detecting..... Nom. 2 µA
 else 0 µA

Current input:

Measurement range -1...25 mA
 Programmable measurement ranges 0...20 and 4...20 mA
 Input resistance..... Nom. 20 Ω + PTC 50 Ω

Voltage input:

Measurement ranges..... -20 mV...12 VDC
 Programmable measurement ranges . 0...1/0.2...1/0...5/1...5 /
 0...10 and 2...10 VDC
 Input resistance Nom. 10 MΩ

Current output:

Signal range (span)..... 0...20 mA
 Programmable signal ranges..... 0...20 / 4...20 /
 20...0 and 20...4 mA
 Load (max.)..... 20 mA / 800 Ω / 16 VDC
 Load stability ≤ 0.01% of span / 100 Ω
 Sensor error detection..... 0 / 3.5 / 23 mA / none
 NAMUR NE 43 Upscale / Downscale 23 mA / 3.5 mA
 Current limit..... ≤ 28 mA

Voltage output:

Signal range 0...10 VDC
 Programmable signal ranges..... 0...1/0.2...1/0...10/0...5/
 1...5/2...10/1...0/1...0.2/
 5...0/5...1/10...0/10...2V
 Load (min.)..... 500 kΩ

Relay outputs:

Max. voltage..... 250 VRMS
 Max. current 2 A / AC or 1 A / DC
 Max. AC power..... 500 VA
 Sensor error detection..... Break / Make / Hold

Observed authority requirements: Standard:

EMC 2004/108/EC:
 Emission and immunity EN 61326
 LVD 73/23/EEC EN 61010-1
 UL, Standard for Safety UL 508